MIDMARK®

Installation/Operation Instructions

9A14000X & 9A20700X Knee Crutch Assembly

KIT COMPONENTS

Part Number	Description	Qty.
9A140002	Knee Crutch Assembly	1
or		
9A140004	Knee Crutch Clamp Assembly	1
or		
9A207002	Knee Crutch Assembly	1
003-0732-00	Installation / Operation Instructions	1

REQUIRED TOOLS

1/2" Open end wrench or socket and ratchet
3/8 drill bit
Power Hand Drill

IMPORTANT INFORMATION

To support the knee and legs for pelvic examinations.

INSTALLATION (1)

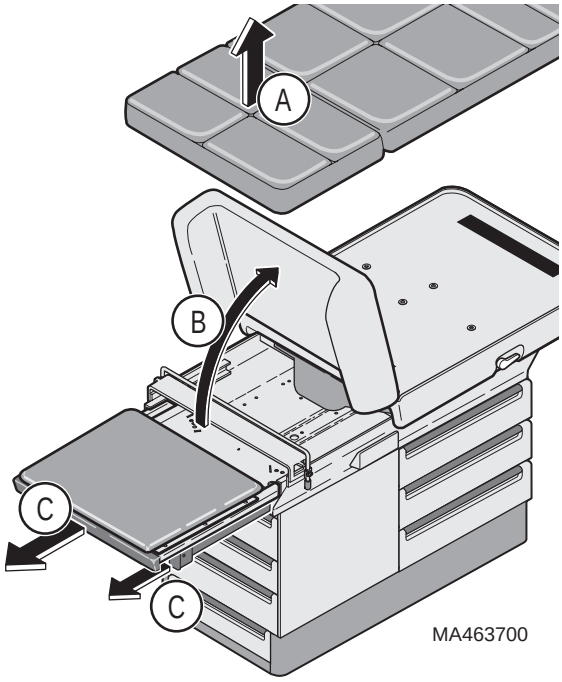

A. Remove upholstered top.
B. Lift seat vertically and secure it to prevent it from falling.
C. Extend stirrups, footrest shelf and pad.

INSTALLATION (2)

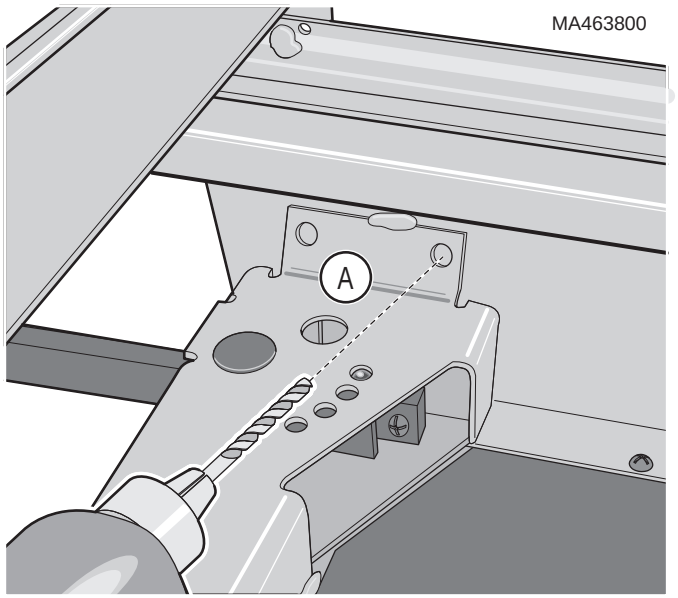

EQUIPMENT ALERT
After drilling mounting holes for knee crutch clamp assemblies remove any burrs from around holes.

A Drill two 3/8" diameter holes at location of pilot holes in mounting tabs on upper wrap assembly.

INSTALLATION (3)

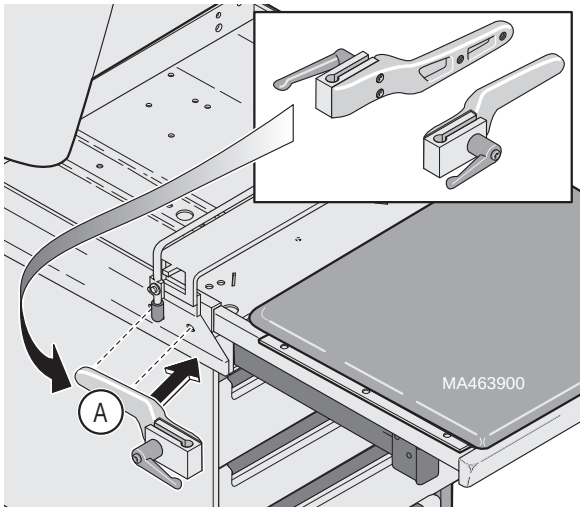

NOTE
There is a right and left hand knee crutch clamp assembly. The clamping ends extend out past foot end of table.

A. Place knee crutch clamp in position.

© Midmark Corporation - 1998

INSTALLATION (4)

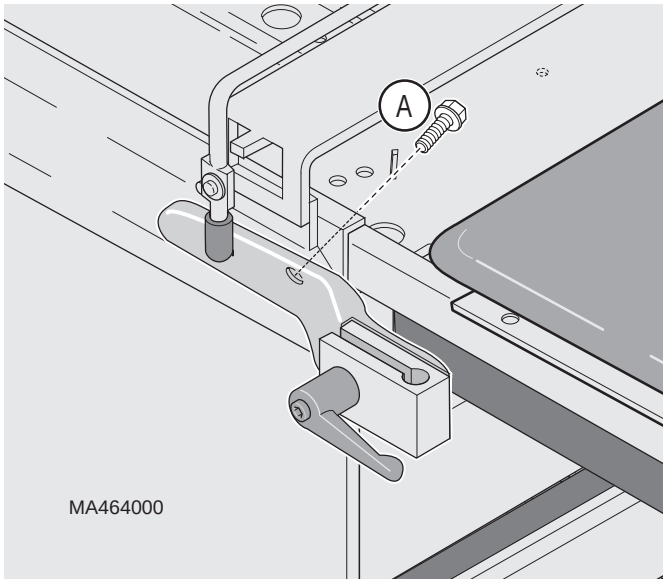

NOTE

Washers supplied with kit are for use, as needed, to fill gap between mounting tab and upper wrap. Tables with welds on top of mounting tab should not require washers.

A. Assure knee crutch clamp is level and install two 5/16"-18 x 5/8" bolts.

NOTE

Mount other clamp using same procedures

INSTALLATION (5)

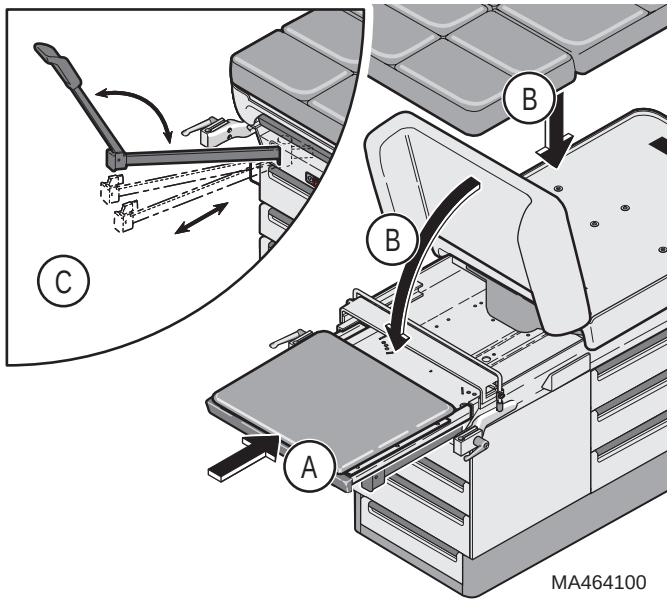

A. Push footrest in to stored position.

B. Lower seat to horizontal position and install upholstered top.

NOTE

Outer fourth position on stirrups will not be usable when knee crutch support bars are installed in knee crutch.

C. Check operation of stirrups.

OPERATION (9A140 KNEE CRUTCH)

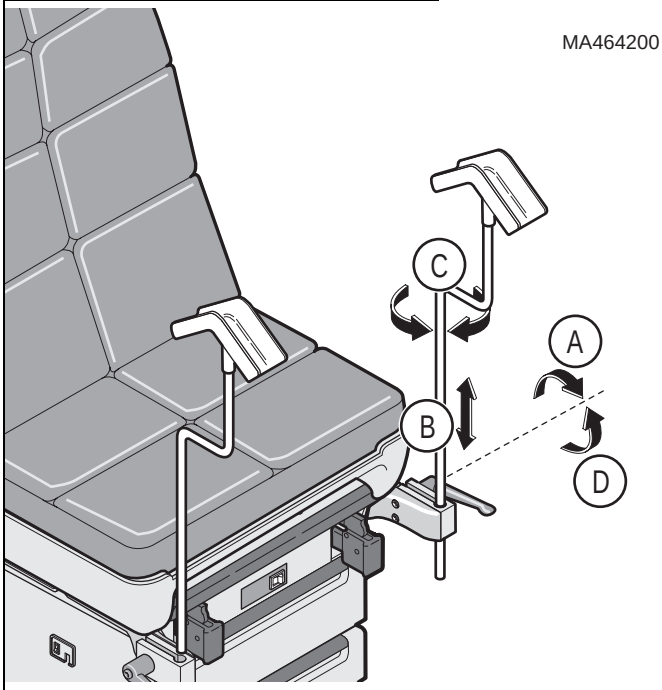

A. Loosen handle.

B. Insert knee crutch assembly to desired height.

C. Rotate knee crutch to desired position.

D. Tighten handle.

OPERATION (9A208 KNEE CRUTCH)

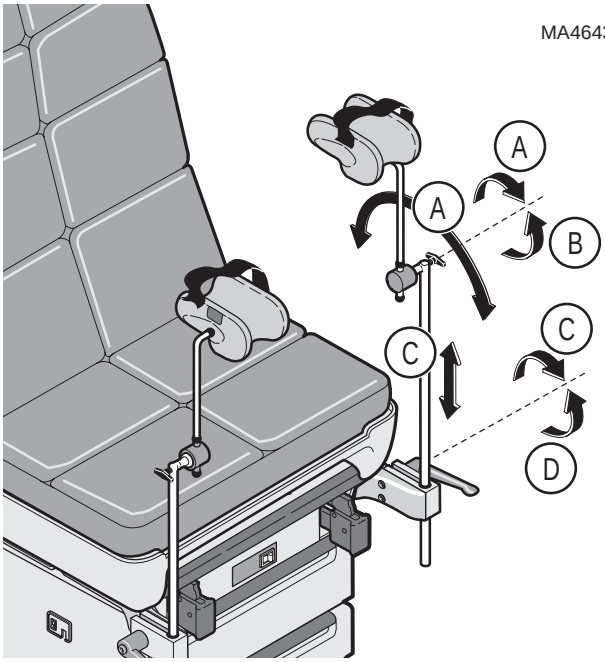

A. Loosen handle and rotate knee crutch to desired position.

B. Tighten handle.

C. Loosen handle and place at desired height.

D. Tighten handle.

© Midmark Corporation - 1998